

PRODUCT DATASHEET

TRUSYS UNIV P 73W 840 N CL PS

TRUSYS UNIVERSAL | The solution for refurbishment - universal fitting to existing trunking luminaire system

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets



PERFOR-
MANCE
CLASS

Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles

Product features

- Multi Lumen function: power steps selectable
- Beam angles: 120° (VW), 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 185 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency: ≤ 3 SDCM




TECHNICAL DATA**Electrical data**


Nominal wattage	73 W / 66 W / 57 W / 49 W / 41 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	330...300...260...220...190 mA
Inrush current	0.33 A
Inrush current time T_{h50}	302 μ s
Max. number of luminaires per miniature circuit breaker B16	8
Max. number of luminaires per miniature circuit breaker C10	8
Max. number of luminaires per miniature circuit breaker C16	14
Power factor λ	≥ 0.90
Total harmonic distortion	$\leq 15 \%$
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	12400 lm / 11420 lm / 10030 lm / 8720 lm / 7380 lm
Luminous efficacy	170 lm/W / 173 lm/W / 176 lm/W / 178 lm/W / 180 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	60 °

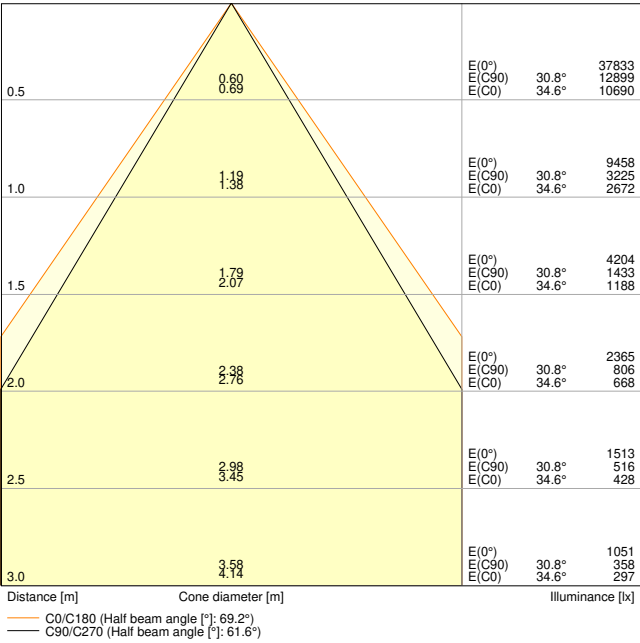


TRUSYS UNIV P 73W 840 N CL PS

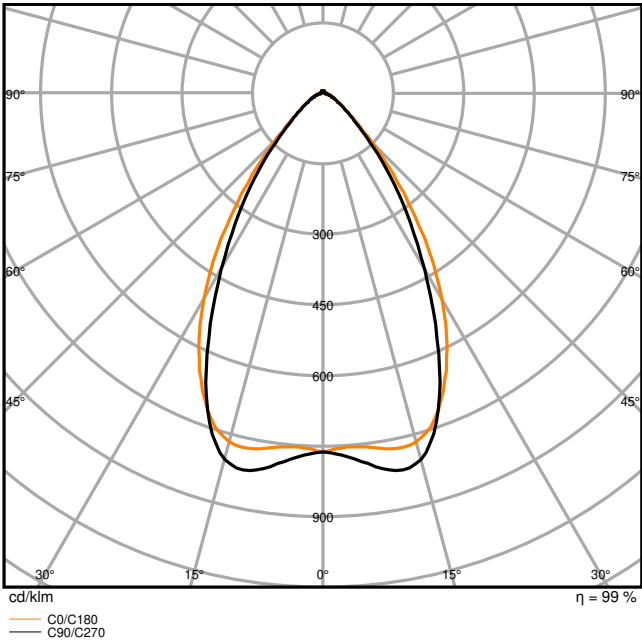

TRUSYS UNIV P 73W 840 N CL PS

Dimensions & Weight

Length	1504.00 mm
Width	68.00 mm
Height	26.00 mm
Product weight	1695.00 g



TRUSYS UNIV P 73/75W 840 CL
PS/DALI

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	120000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L90/B10 at 25 °C	54000 h
Number of switching cycles	50000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	450...400...350...300...250 mA
ECG - Output ripple current	< 5 %

Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
---------------------------------	---

Type of emergency operation test	None
Wattage in emergency operation mode	73 W
Luminous flux in emergency operation mode	12400 lm

Certificates & Standards

Standards	CE / CB / UKCA / ENEC / TÜV / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00033-V01.01-EN
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

EQUIPMENT / ACCESSORIES

– Various accessories available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	TRUSYS UNIVERSAL
	Legal information	Legal insert
	Legal information	LISO Insert TRUSYS UNIVERSAL
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205497
	Declarations of conformity	CE Declaration Trusys Universal
	Declarations of conformity UKCA	UKCA Declaration Trusys Universal
	EPD	EPD EN TRUSYS UNIVERSAL DALI


Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS UNIV P 73W 840 N CL PS
	LDT file (Eulumdat)	TRUSYS UNIV P 73W 840 N CL PS
	ULD file (DIALux)	TRUSYS UNIV P 73W 840 N CL PS
	ROLF file (RELUX)	TRUSYS UNIV P 73W 840 N CL PS
	UGR file (UGR table)	TRUSYS UNIV P 73W 840 N CL PS
	Light distribution curve type cone	TRUSYS UNIV P 73W 840 N CL PS
	Light distribution curve type polar	TRUSYS UNIV P 73W 840 N CL PS
CAD/BIM files		Document name
	BIM Revit 3D	TruSys Universal
	CAD STEP 3D	TRUSYS UNIV
Tender texts		Document name
	Tender documents	TRUSYS UNIVERSAL 73W 840 N CL PS-EN

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854311604	Folding box 1	93 mm x 1,540 mm x 69 mm	1985.00 g	9.88 dm ³
4099854311611	Shipping box 4	1,560 mm x 295 mm x 110 mm	9400.00 g	50.62 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



TruSys UNIVERSAL 50W ON/OFF





W	LM	1	2	3
20W	3700	—	—	—
30W	5550	—	ON	—
40W	7400	—	—	ON
50W	9000	—	ON	ON

TruSys UNIVERSAL 73W ON/OFF



W	LM	1	2	3	4
41W	7380	—	—	—	ON
49W	8720	—	—	ON	—
57W	10030	—	ON	—	—
60W	11420	ON	—	—	—
73W	12400	—	—	—	—



1x TRUSYS UNIV	2x TRUSYS UNIV	...	nx TRUSYS UNIV
CLIP A	CLIP A	CLIP A	CLIP A
TRUSYS UNIV 50W ON/OFF	TRUSYS UNIV 50W ON/OFF	TRUSYS UNIV 50W ON/OFF	TRUSYS UNIV 50W ON/OFF
TRUSYS UNIV 73W ON/OFF	TRUSYS UNIV 73W ON/OFF	TRUSYS UNIV 73W ON/OFF	TRUSYS UNIV 73W ON/OFF
TRUSYS UNIV 100W ON/OFF	TRUSYS UNIV 100W ON/OFF	TRUSYS UNIV 100W ON/OFF	TRUSYS UNIV 100W ON/OFF
TRUSYS UNIV 130W ON/OFF	TRUSYS UNIV 130W ON/OFF	TRUSYS UNIV 130W ON/OFF	TRUSYS UNIV 130W ON/OFF
TRUSYS UNIV 160W ON/OFF	TRUSYS UNIV 160W ON/OFF	TRUSYS UNIV 160W ON/OFF	TRUSYS UNIV 160W ON/OFF
TRUSYS UNIV 190W ON/OFF	TRUSYS UNIV 190W ON/OFF	TRUSYS UNIV 190W ON/OFF	TRUSYS UNIV 190W ON/OFF
TRUSYS UNIV 220W ON/OFF	TRUSYS UNIV 220W ON/OFF	TRUSYS UNIV 220W ON/OFF	TRUSYS UNIV 220W ON/OFF
TRUSYS UNIV 250W ON/OFF	TRUSYS UNIV 250W ON/OFF	TRUSYS UNIV 250W ON/OFF	TRUSYS UNIV 250W ON/OFF
TRUSYS UNIV 280W ON/OFF	TRUSYS UNIV 280W ON/OFF	TRUSYS UNIV 280W ON/OFF	TRUSYS UNIV 280W ON/OFF
TRUSYS UNIV 310W ON/OFF	TRUSYS UNIV 310W ON/OFF	TRUSYS UNIV 310W ON/OFF	TRUSYS UNIV 310W ON/OFF
TRUSYS UNIV 340W ON/OFF	TRUSYS UNIV 340W ON/OFF	TRUSYS UNIV 340W ON/OFF	TRUSYS UNIV 340W ON/OFF
TRUSYS UNIV 370W ON/OFF	TRUSYS UNIV 370W ON/OFF	TRUSYS UNIV 370W ON/OFF	TRUSYS UNIV 370W ON/OFF
TRUSYS UNIV 400W ON/OFF	TRUSYS UNIV 400W ON/OFF	TRUSYS UNIV 400W ON/OFF	TRUSYS UNIV 400W ON/OFF
TRUSYS UNIV 430W ON/OFF	TRUSYS UNIV 430W ON/OFF	TRUSYS UNIV 430W ON/OFF	TRUSYS UNIV 430W ON/OFF
TRUSYS UNIV 460W ON/OFF	TRUSYS UNIV 460W ON/OFF	TRUSYS UNIV 460W ON/OFF	TRUSYS UNIV 460W ON/OFF
TRUSYS UNIV 490W ON/OFF	TRUSYS UNIV 490W ON/OFF	TRUSYS UNIV 490W ON/OFF	TRUSYS UNIV 490W ON/OFF
TRUSYS UNIV 520W ON/OFF	TRUSYS UNIV 520W ON/OFF	TRUSYS UNIV 520W ON/OFF	TRUSYS UNIV 520W ON/OFF
TRUSYS UNIV 550W ON/OFF	TRUSYS UNIV 550W ON/OFF	TRUSYS UNIV 550W ON/OFF	TRUSYS UNIV 550W ON/OFF
TRUSYS UNIV 580W ON/OFF	TRUSYS UNIV 580W ON/OFF	TRUSYS UNIV 580W ON/OFF	TRUSYS UNIV 580W ON/OFF
TRUSYS UNIV 610W ON/OFF	TRUSYS UNIV 610W ON/OFF	TRUSYS UNIV 610W ON/OFF	TRUSYS UNIV 610W ON/OFF
TRUSYS UNIV 640W ON/OFF	TRUSYS UNIV 640W ON/OFF	TRUSYS UNIV 640W ON/OFF	TRUSYS UNIV 640W ON/OFF
TRUSYS UNIV 670W ON/OFF	TRUSYS UNIV 670W ON/OFF	TRUSYS UNIV 670W ON/OFF	TRUSYS UNIV 670W ON/OFF
TRUSYS UNIV 700W ON/OFF	TRUSYS UNIV 700W ON/OFF	TRUSYS UNIV 700W ON/OFF	TRUSYS UNIV 700W ON/OFF
TRUSYS UNIV 730W ON/OFF	TRUSYS UNIV 730W ON/OFF	TRUSYS UNIV 730W ON/OFF	TRUSYS UNIV 730W ON/OFF
TRUSYS UNIV 760W ON/OFF	TRUSYS UNIV 760W ON/OFF	TRUSYS UNIV 760W ON/OFF	TRUSYS UNIV 760W ON/OFF
TRUSYS UNIV 790W ON/OFF	TRUSYS UNIV 790W ON/OFF	TRUSYS UNIV 790W ON/OFF	TRUSYS UNIV 790W ON/OFF
TRUSYS UNIV 820W ON/OFF	TRUSYS UNIV 820W ON/OFF	TRUSYS UNIV 820W ON/OFF	TRUSYS UNIV 820W ON/OFF
TRUSYS UNIV 850W ON/OFF	TRUSYS UNIV 850W ON/OFF	TRUSYS UNIV 850W ON/OFF	TRUSYS UNIV 850W ON/OFF
TRUSYS UNIV 880W ON/OFF	TRUSYS UNIV 880W ON/OFF	TRUSYS UNIV 880W ON/OFF	TRUSYS UNIV 880W ON/OFF
TRUSYS UNIV 910W ON/OFF	TRUSYS UNIV 910W ON/OFF	TRUSYS UNIV 910W ON/OFF	TRUSYS UNIV 910W ON/OFF
TRUSYS UNIV 940W ON/OFF	TRUSYS UNIV 940W ON/OFF	TRUSYS UNIV 940W ON/OFF	TRUSYS UNIV 940W ON/OFF
TRUSYS UNIV 970W ON/OFF	TRUSYS UNIV 970W ON/OFF	TRUSYS UNIV 970W ON/OFF	TRUSYS UNIV 970W ON/OFF
TRUSYS UNIV 1000W ON/OFF	TRUSYS UNIV 1000W ON/OFF	TRUSYS UNIV 1000W ON/OFF	TRUSYS UNIV 1000W ON/OFF

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.