


## PRODUCT DATASHEET

### ENDURA® Classic Square Down Rusty

ENDURA® Classic Square | Outdoor Endura Classic square with socket GU10

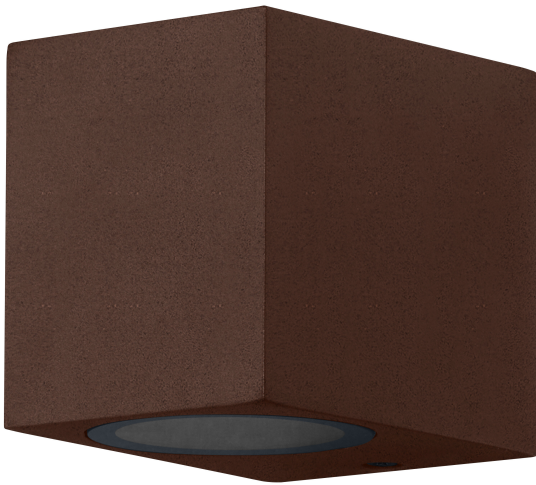

#### Areas of application

- Entrance lighting
- Patios, balconies
- Building facades

#### Product benefits

- High flexibility in the choice of the light source thanks to GU10 socket
- Easy and quick installation
- High-quality materials

#### Product features

- Die-cast aluminum housing




TECHNICAL DATA

Electrical data

|                  |               |
|------------------|---------------|
| Nominal voltage  | 220...240 V   |
| Mains frequency  | 50...60 Hz    |
| Protection class | I             |
| Operating mode   | Mains voltage |

Dimensions & Weight

|                |          |
|----------------|----------|
| Length         | 68.00 mm |
| Width          | 81.00 mm |
| Height         | 92.00 mm |
| Product weight | 300.00 g |



ENDURA CLASSIC SQUARE  
DOWN BK GU10

Materials & Colors

|                |          |
|----------------|----------|
| Product color  | Rust     |
| Housing color  | Rust     |
| Body material  | Aluminum |
| Cover material | Glass    |

Application & Mounting

|                                        |                             |
|----------------------------------------|-----------------------------|
| Ambient temperature range              | -20...+40 °C                |
| Temperature range at storage           | -20...+80 °C                |
| Type of connection                     | Terminal, 3-Pole (L, N, PE) |
| Type of protection                     | IP44/IP44                   |
| Protection class IK (shock resistance) | IK04                        |
| Dimmable                               | No                          |
| Mounting type                          | Surface                     |
| Mounting location                      | Wall                        |

|                          |         |
|--------------------------|---------|
| Application environment  | Outdoor |
| With light source        | No      |
| Replaceable light source | No      |
| Holder designation       | GU10    |

### Emergency lighting

|                                  |      |
|----------------------------------|------|
| Type of emergency operation test | None |
|----------------------------------|------|

### Certificates & Standards

|                                                      |           |
|------------------------------------------------------|-----------|
| Standards                                            | CE / UKCA |
| Luminaire with limited surface temperature, "D sign" | No        |
| Ball shot safe                                       | No        |

### Additional product data

|                       |                                                                  |
|-----------------------|------------------------------------------------------------------|
| Product remark        | Maximum bulb wattage: 35W (7W LED) / Available from January 2026 |
| Number of illuminants | 1                                                                |

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

### Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

### DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                 |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------|
|  | User instruction / safety instructions | ENDURA CLASSIC SQUARE UP DOWN |
|  | Legal information                      | Safety insert G11219578       |

### LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume               |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4099854712395 | Folding box<br>1             | 77 mm x 92 mm x 102 mm               | 351.00 g     | 0.72 dm <sup>3</sup> |
| 4099854712401 | Shipping box<br>6            | 245 mm x 110 mm x 232 mm             | 2287.00 g    | 6.25 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.