

# PRODUCT DATASHEET

## ENDURA Classic Post 80cm E27

ENDURA® CLASSIC POST | Stainless steel luminaires with glass diffuser



### Areas of application

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies
- Pathway lighting
- Driveways

### Product benefits

- High flexibility in the choice of the light source thanks to E27 socket
- Easy and quick installation

### Product features

- Stainless steel housing
- Diffuser made of clear glass with hammer finish
- Available with and without motion sensor
- Available as wall and bollard luminaires
- Suitable for smart applications thanks to compatibility with SMART+ lamps

**502 Bad Gateway**


TECHNICAL DATA

Electrical data

|                  |               |
|------------------|---------------|
| Nominal voltage  | 220...240 V   |
| Mains frequency  | 50...60 Hz    |
| Protection class | I             |
| Operating mode   | Mains voltage |

Dimensions & Weight

|                |           |
|----------------|-----------|
| Diameter       | 127.00 mm |
| Height         | 800.00 mm |
| Product weight | 1400.00 g |

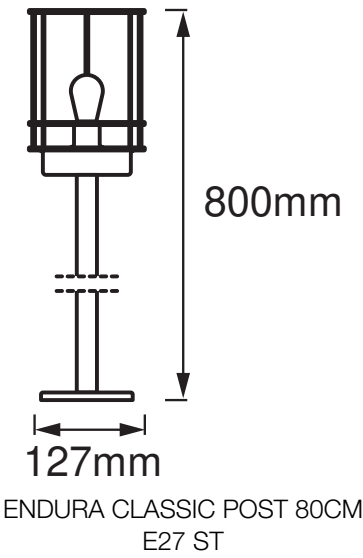

Materials & Colors

|                 |                 |
|-----------------|-----------------|
| Product color   | Steel           |
| Housing color   | Steel           |
| Body material   | Stainless steel |
| Mercury content | 0.0 mg          |

Application & Mounting

|                              |              |
|------------------------------|--------------|
| Ambient temperature range    | -20...+40 °C |
| Temperature range at storage | -20...+85 °C |

502 Bad Gateway

|                          |                |
|--------------------------|----------------|
| Type of connection       | Screw terminal |
| Type of protection       | IP44           |
| Dimmable                 | No             |
| Mounting type            | Standing       |
| Mounting location        | Floor          |
| Application environment  | Outdoor        |
| With light source        | No             |
| Replaceable light source | No             |
| Holder designation       | E27            |

Certificates & Standards

|           |                 |
|-----------|-----------------|
| Standards | CE / EAC / UKCA |
|-----------|-----------------|

Additional product data

|                       |                            |
|-----------------------|----------------------------|
| Product remark        | Maximum bulb wattage: 60 W |
| Number of illuminants | 1                          |

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                      |
|------------------------------------------------------------------------------------|----------------------------------------|------------------------------------|
|  | User instruction / safety instructions | ENDURA CLASSIC POST                |
|  | Legal information                      | Legal insert I-Outdoor             |
|  | Declarations of conformity             | CE Declaration Endura Classic Post |

502 Bad Gateway

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075206588 | Folding box<br>1             | 154 mm x 154 mm x 826 mm             | 1470.00 g    | 19.59 dm <sup>3</sup> |
| 4058075206595 | Shipping box<br>4            | 839 mm x 322 mm x 326 mm             | 6456.00 g    | 88.07 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

502 Bad Gateway